


STEEL PIPE 30 IN. O.D. 40 FT LONG OR LESS, 12 PIECES PER CAR,
GONDOLAS WITH HIGH SIDES

RAC 12131B
New 04-2010



Item	No. of Pcs.	Description
A		Vacant
B	3 per pile	Bearing Pieces; Hardwood, minimum 2 in. x 4 in. x 9 ft. spaced as shown.
C	4 per pile	High tension bands: 2in. x .044in., encircling entire pile, suitably spaced as shown

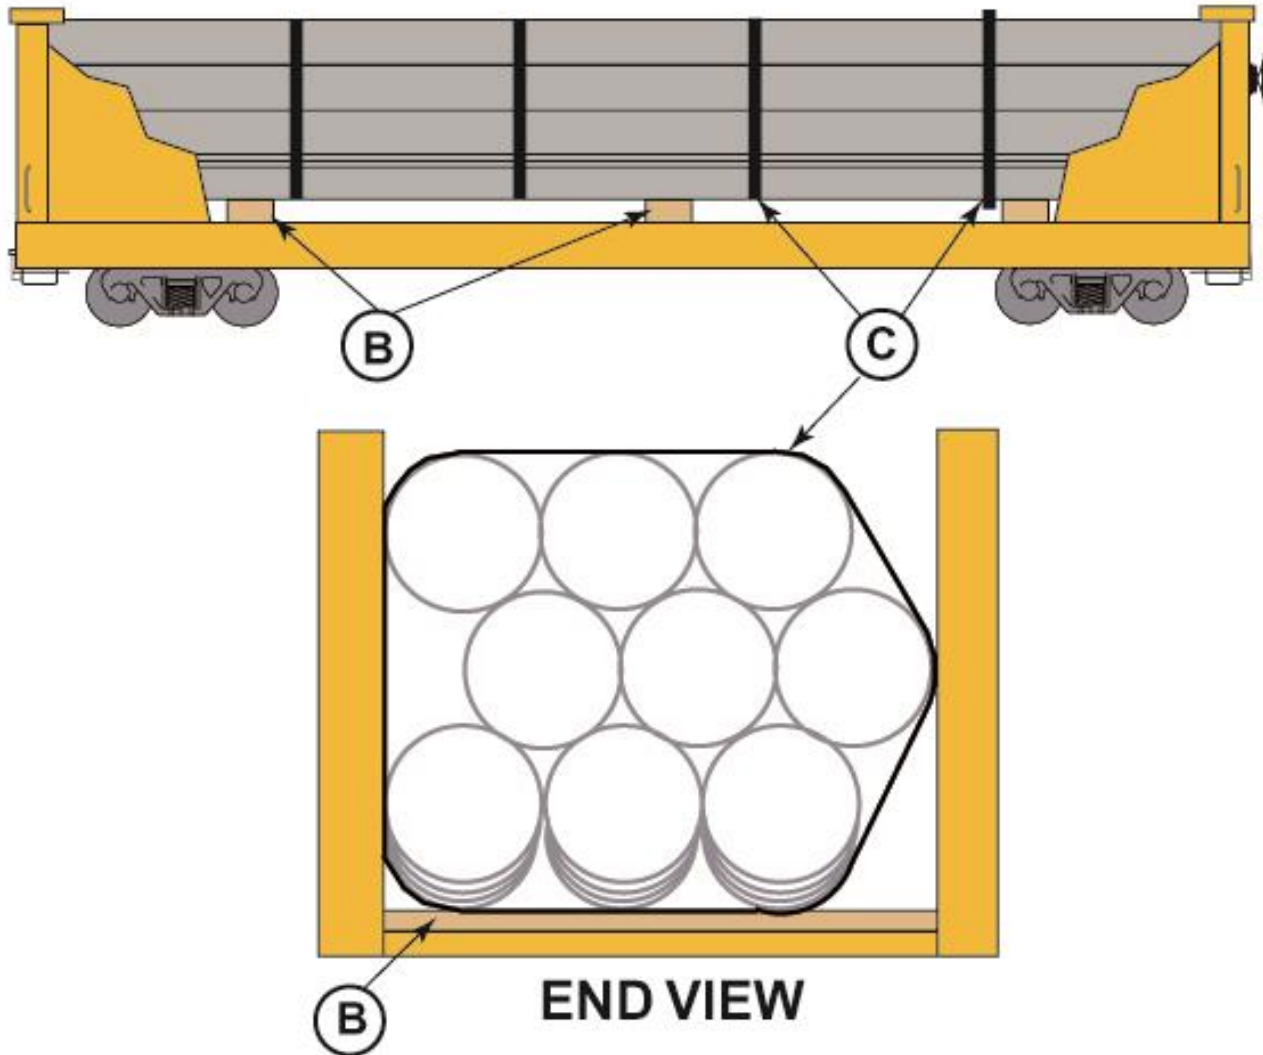

STEEL PIPE 30 IN. O.D. 40 FT LONG OR LESS, 12 PIECES PER CAR,
GONDOLAS WITH HIGH SIDES

RAC 12131B (Concluded)
New 04-2010

Notes and Additional Requirements:

1. Suitable end bulkhead, below top of car ends, may be used to prevent pipe contacting ends of car. Use optional.
2. Pile must be located centrally lengthwise on car.
3. Bottom of pipes in top row must be $1/3$ below the top chord of car.
4. Couplings, sleeves, or thread protectors must be staggered to avoid contact and maintain even load.

Reference the General Rules for additional details