




Railway Association
of Canada

GYPROC PANELS 13 FT. X 8 FT. X ½ IN. OVERSIZED LOADED ON A 66 FT.
FLAT CAR WITH PERMANENT END BULKHEADS

RAC 15243

New -04-2000

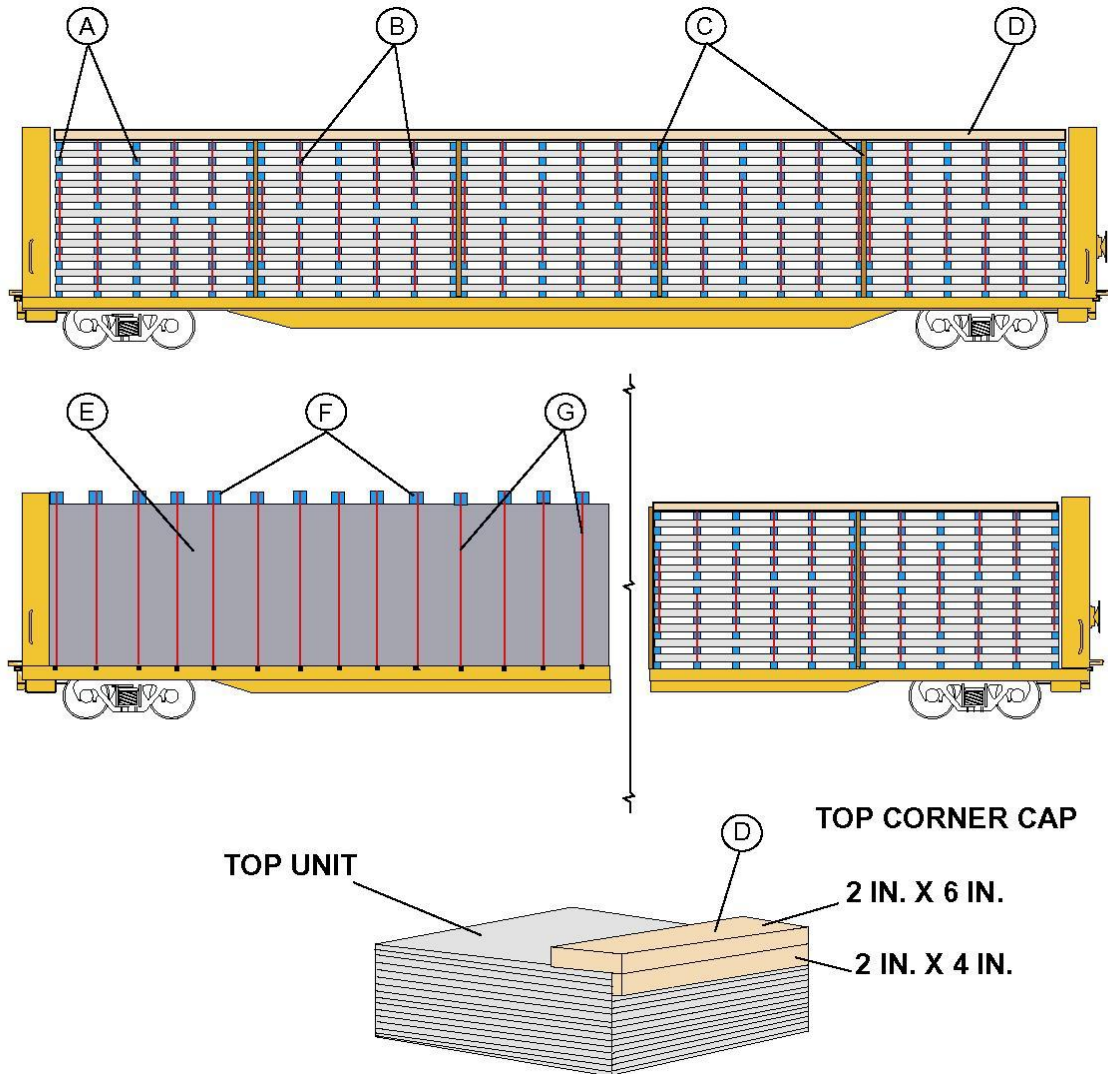

Item	No. of Pcs.	Description
A	Minimum of 6 per units	Separators; Lumber, 4 in. x 4 in. Length to be equal to width of units and in one piece.



**GYPROC PANELS 13 FT. X 8 FT. X ½ IN. OVERSIZED LOADED ON A 66 FT.
FLAT CAR WITH PERMANENT END BULKHEADS**

RAC 15243 (concluded)
New -04-2000

Item	No. of Pcs.	Description
C	1	OSB: Locate one between units
D	1	Top Corner Cap: Top corner cap: Cap assembly consist of one (1) piece lumber, 2 in. x 4 in. and one (1) piece lumber, 2 in. x 6 in. Locate corner cap along top units.
E	1	Tarp: A tarp should cover the load for protection.
F	Minimum of 6 per units	Unit boards: Lumber 4 in. x 4 in. Locate each 4 x 4 in line with separators on top of the tarp.
G	1 per 4 in. x 4in. lumber	Unitizing straps: Locate one per 4 in. x 4 in. lumber on top of load and secure to the car on each side of the load.

Notes:

1. One unit is 13 ft. long x 8 ft. wide x 11.25 in. high.
2. 15 panels per unit
3. 5 units wide x 11 units high fit on car
4. Load must be centered on car, voids in center of car should be filled.

See general rules for further details.