


TIES, CONCRETE – CONCRETE TIE CAR

RAC 13141
New 04-2019

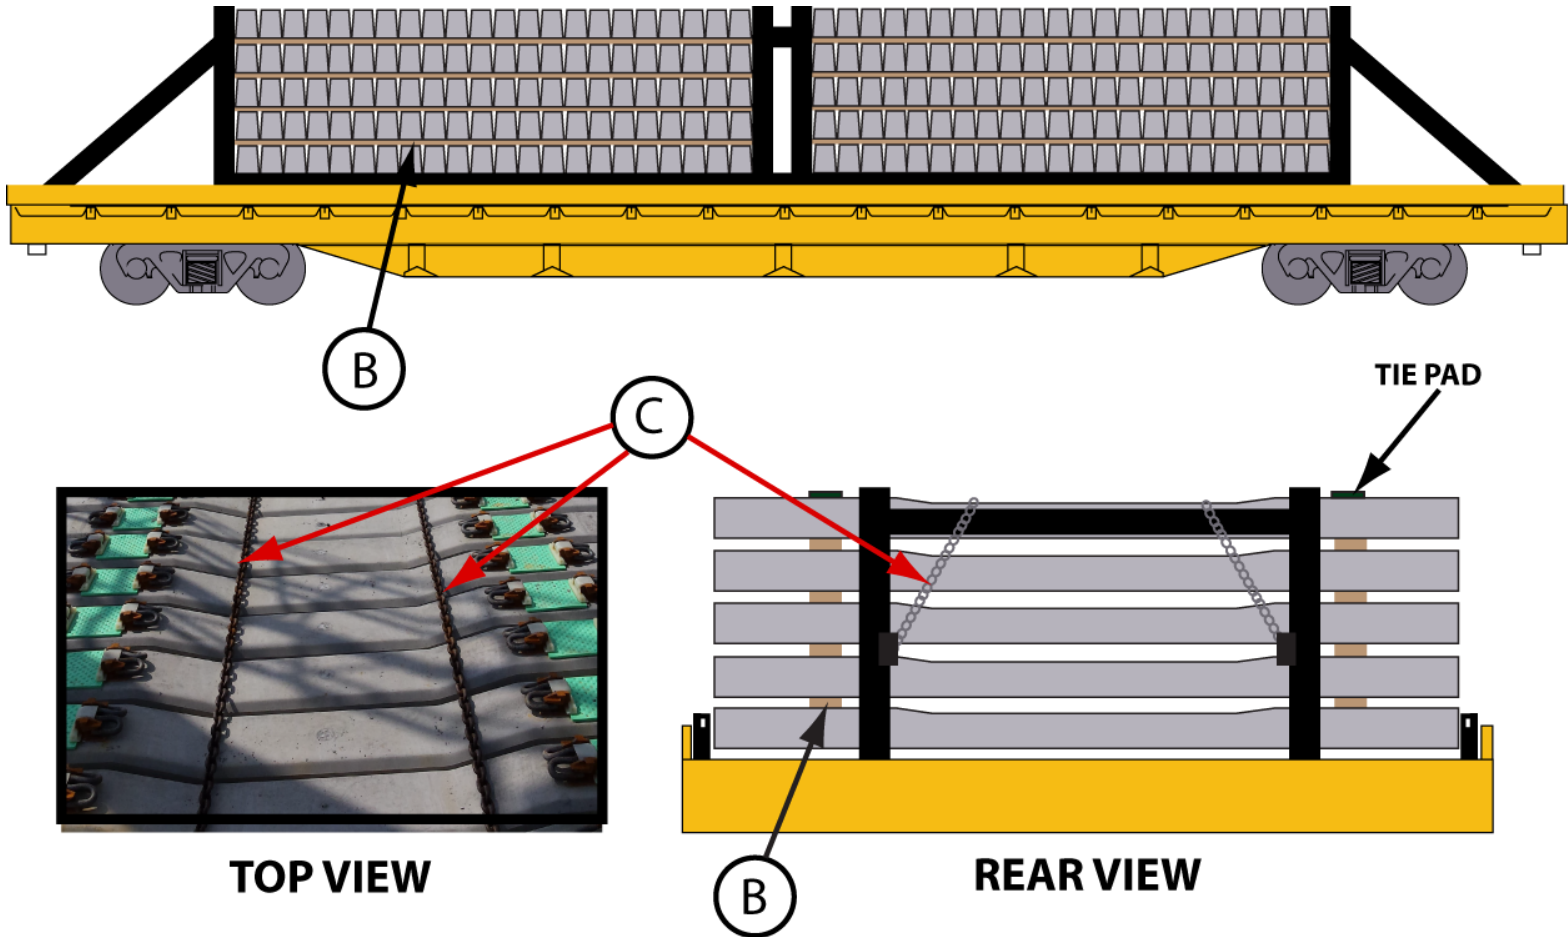

TIES, CONCRETE – CONCRETE TIE CAR

RAC 13141 (Concluded)
New 04-2019

Item	No. of Pcs.	Description
A		Vacant
B	2 per layer	Lengthwise separator pieces: lumber, minimum full 3in x 4in x length bulkhead to bulkhead in one piece preferable, maximum 2 pieces. Place on tie pad between rail clips one each side.
C	2 per section	Chain tie down: 3/8in attach from bulkhead to bulkhead over each section.

Notes and additional Requirements:

1. Height of load not to exceed height of bulkheads.
2. Both piles to be of equal weight or close so as not to cause an imbalance load. Car not to travel with one empty bay.
3. Deck of flatcars must be free of debris, snow and ice before loading.
4. No void space permitted between ties and bulkhead, void if any to be packed-out with suitable material and secured to bulkhead.

See General Rules for further details.