


WIRE COILS, 66 IN. to 86 IN. LONG, WIRE DIAMETER 5.5 TO 9.0 MM  
FLAT CARS WITH PERMANENT END BULKHEADS

RAC 12407  
New 8-2003

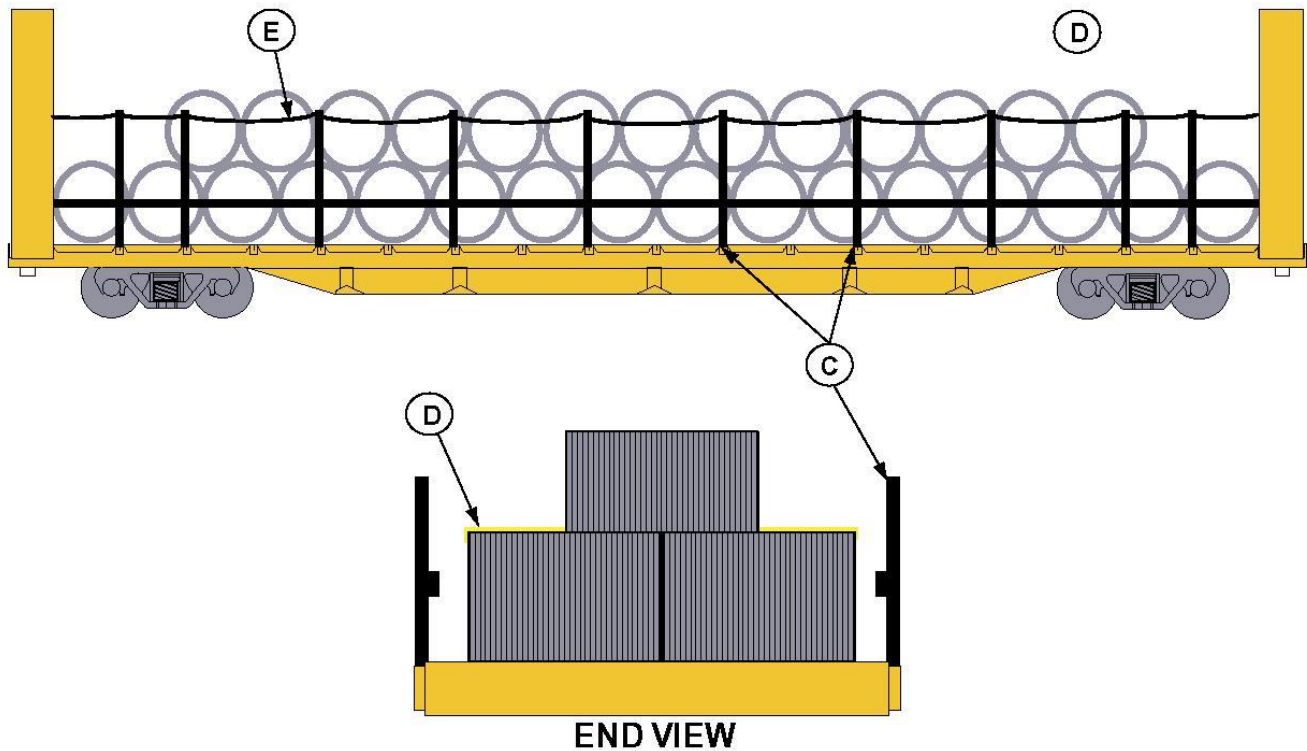

Item	No. of Pcs.	Description
A		Vacant
C	10 pairs per car	Steel Side Stakes: 4 in. x 6 in. Locate in stake pockets.
D	4 each per top layer coils	Unit bands: 1 ¼ in. X .029 in. high tension steel bands. Locate to unitize top coils to bottom coils. Locate bands at 3,5,7 and 9 o'clock
E	2 per load	Chains: 3/8 in. attached to Item C side stakes and bulkheads from end to end of car.

WIRE COILS, 66 IN. to 86 IN. LONG, WIRE DIAMETER 5.5 TO 9.0 MM., FLAT  
CARS WITH PERMANENT END BULKHEADS

RAC12407 (conclusion)  
New 8-2003

**Notes:**

1. Load must be centrally located on car.
2. Top layer coils must be properly nested in the bottom layers
3. Load must not exceed two layers high.
4. All coils to be tight against each other to eliminate voids.
5. Longer coils must be placed in the bottom tier.
6. No voids in the middle of the car.
7. Top row must be centered.
8. Wire diameters are: 5.5 to 9.0 MM



**5,5 mm**



**9 mm**

**THE WIRE DIAMETER IS LIMITED TO THE ABOVE SPECIFICATIONS.**

9. Inspect stake pockets for cracks in welds and or deformity prior to attaching securement.

For further details see General Rules.