



WIRE COILS, 50 IN. IN DIAMETER OR LESS SPECIALLY EQUIPPED FLAT  
CARS WITH PERMANENT END BULKHEADS, STEEL SIDE RAILS  
EXTENDING 4 IN. ABOVE CAR DECK, AND 6 IN. X 8 IN. RAIL TIES

RAC 12434D

New 9-1997 (Ref: AAR Fig 34-G)

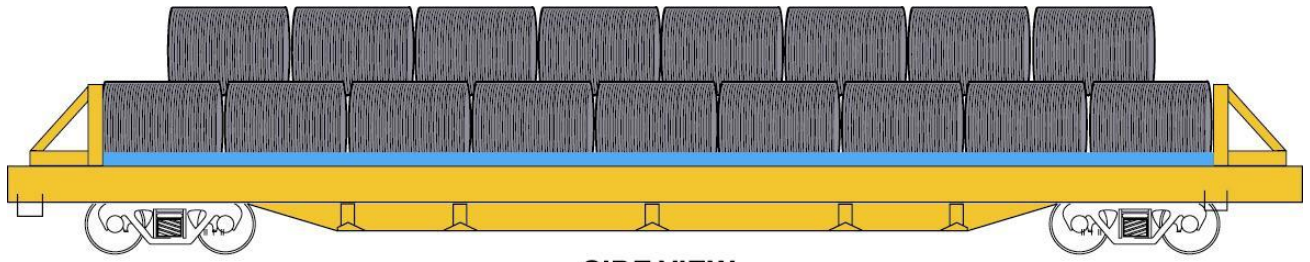

SIDE VIEW

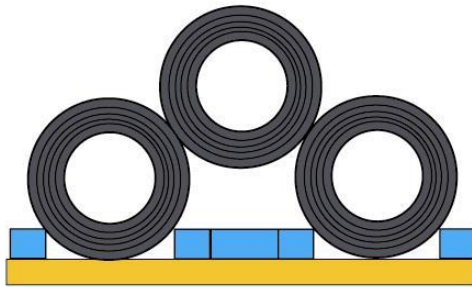

END VIEW

Item	No. of Pcs.	Description
A		Vacant.

**Notes:**

1. Load must be centrally located on car.
2. Each coil is to be tied with 4 (4), ¼ in. diameter wire ties located equally spaced on coil while compressed.
3. All coils to be tight against each other to eliminate voids.
4. Upper row of coils must be nested in the rows below.

See General Rules for further details.