
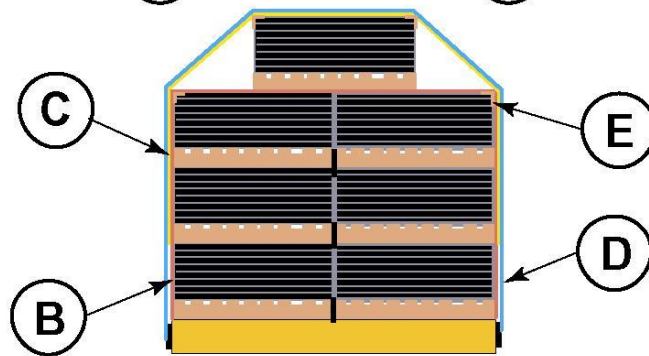



PALLETIZED RUBBER MATS, 6 FT. LONG, 22 INCHES HIGH X 48 IN. WIDE  
FLAT CARS WITH PERMANENT END BULKHEADS, INSIDE LENGTH 66 FT.

RAC 13020

New. 01-2004

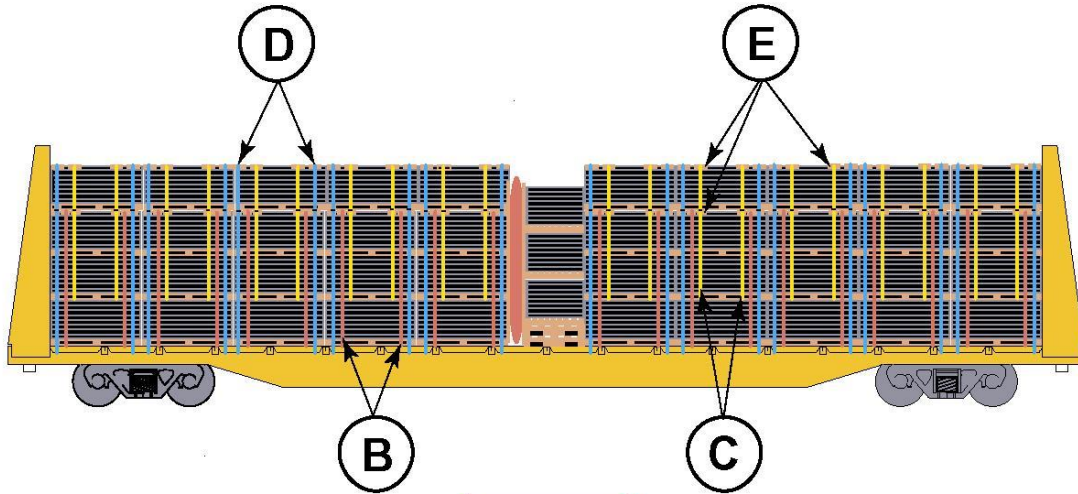

**END VIEW**

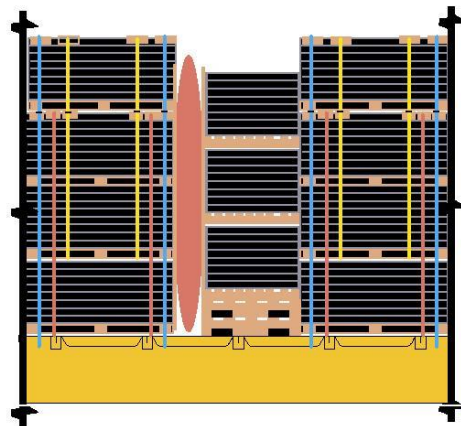

**SKETCH 1**

**PALLETIZED RUBBER MATS, 6 FT. LONG, 22 INCHES HIGH X 48 IN. WIDE,  
FLAT CARS WITH PERMANENT END BULKHEADS, INSIDE LENGTH 66 FT.**

RAC 13020 (concluded)  
New. 01-2004

<b>Item</b>	<b>No. of Pcs.</b>	<b>Description</b>
A		Vacant
B	2 per package	Layer encircling bands: they are 1-1/4 in. x .031 in. high-tension bands. Encircle all packages from first, second and third layer.
C	2 per package	Layer encircling bands: they are 1-1/4 in. x .031 in. high-tension bands. Encircle all packages from second, third and fourth layer.
D	2 per package	Load interlacing bands: they are 1-1/4 in. x .031 high-tension bands. Encircle load and secure to lading strap anchors.
E	1 per band	Edge protectors: all packages from third and fourth row must be protected with edge protectors.

**NOTE:**

1. **SKETCH 1**

Filler: filler pieces are used to fill void at center of load. Three pallets of rubber mats are loaded crosswise on top of filler pieces such as pallets, in a way that the height of the rubber mats pallets equals half the height of the fourth row. Void between crosswise and lengthwise pallets may be filled with sheets of particleboard, pallets or an inflatable bag positioned between two sheets of particleboard.

2. Inspect stake pockets for cracks in welds and or deformity prior to attaching securement.

For further details see General Rules.