


RUBBER MATS ON PALLETTS 4 FT. X 6FT, CENTER BEAM FLAT CARS WITH  
PERMANENT END BULKHEADS

RAC 13021  
New. 01-2013

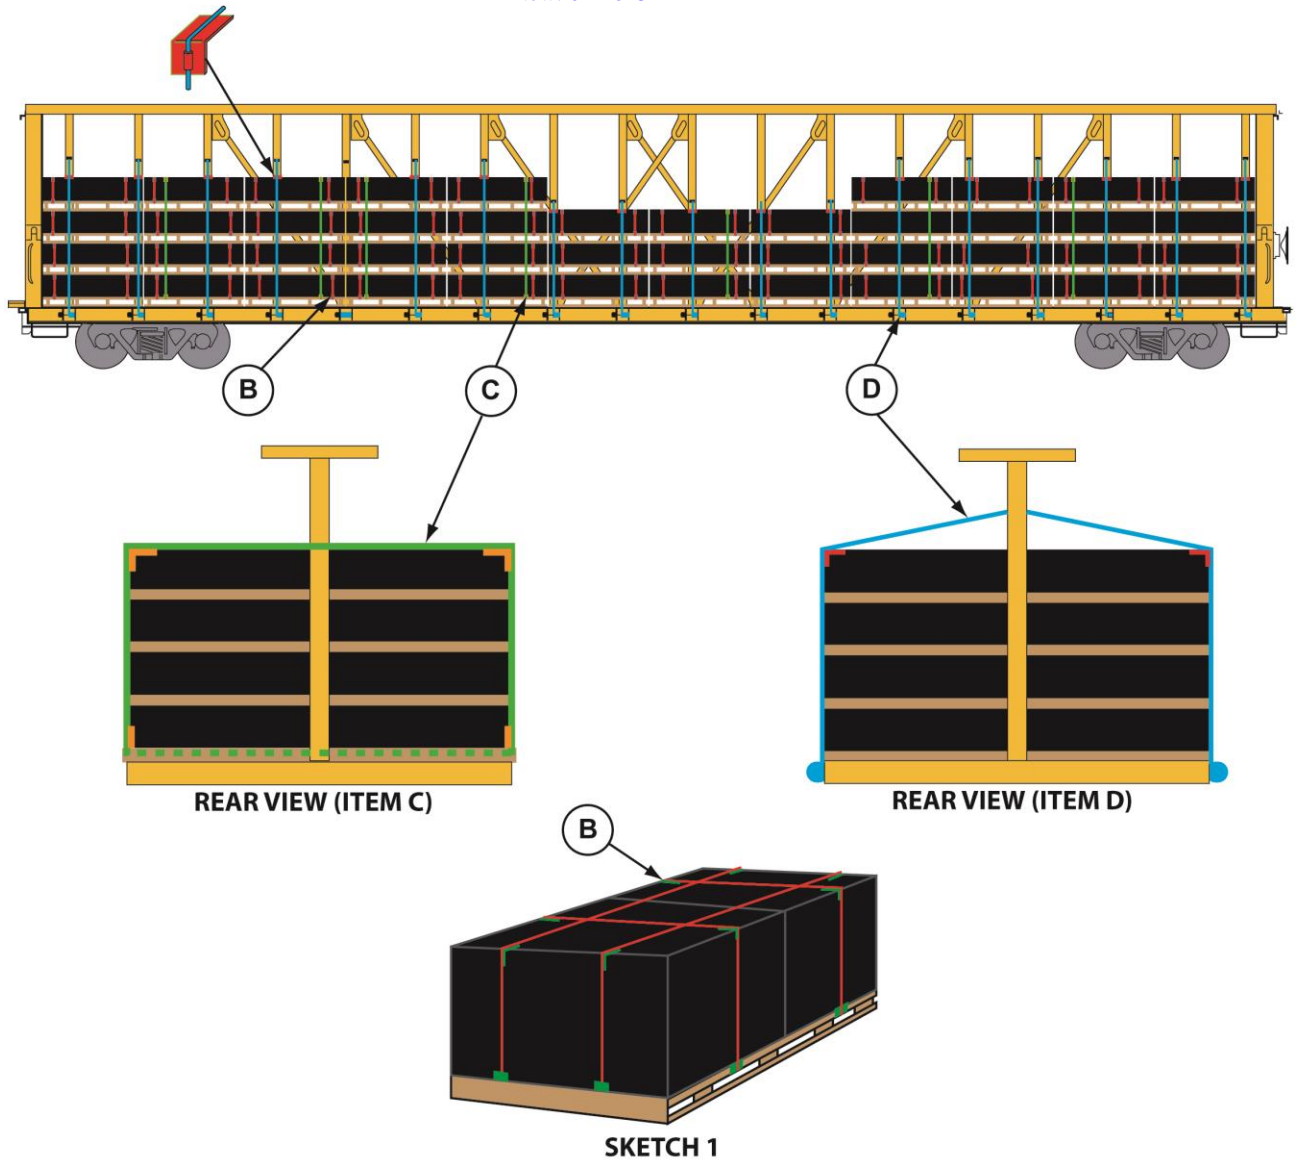

Item	No. of Pcs.	Description
A		Vacant
B	2 per package	Package bands: They are 1/2 in. x .058 in. high-tension bands with corner protectors. Bands tie carpets to pallets.

**RUBBER MATS ON PALLETS 4 FT. X 6FT, CENTER BEAM FLAT CARS WITH  
PERMANENT END BULKHEADS,**

**RAC 13021 (Concluded)**

New. 01-2013

Item	No. of Pcs.	Description
C	1 per pile as necessary	Load encircling bands: they are 1-1/4 in. x .029 in. high-tension bands. When only one cable contacts a pile a steel band encircles piles both side of partition. <b>REAR VIEW (ITEM C)</b>
D	All cables must be used	Cables: Cables: 3/8 in. diameter, minimum of 8,800 lbs. Breaking strength. Cable assemblies must be equipped with edge protectors. Winch assemblies must be equipped with a device to maintain tension. Prior to tightening, there must be a minimum of 2½ wraps of cable around the winch drum. All cables must be used and must be free of kinks and tangles. Tension to be applied with the use of an 18 in. bar or ¾ in ratchet. Cables are to be secured to A-frame in slot nearest to top of top package.

**Notes:**

1. Packages are 4’x6’ or 2 bundles 3’x4’ on pallet with 4 package bands 2 across and 2 lengthwise. **(SKETCH 1)**
2. Load consists of 12 piles on each side, 9 piles 4 high and 3 piles 3 high.
3. Load weight distribution must be in accordance with AAR Genera Rule 3.5.2 indicating the percentage of deck length utilized versus correspondent permissible percentage of load limit for that length, see table below.

*Allowable load limit on reduced deck length utilized.*

<i>Percent of deck length utilized</i>	<i>100</i>	<i>75</i>	<i>50</i>	<i>25</i>
<i>Percent of load limit permitted</i>	<i>100</i>	<i>75</i>	<i>50</i>	<i>25</i>

See General Rules for further details.