


ROOF FELT PAPER ROLLS ON PALLETS FLAT CARS WITH PERMANENT  
END BULKHEADS

RAC 15242

New -04-2000

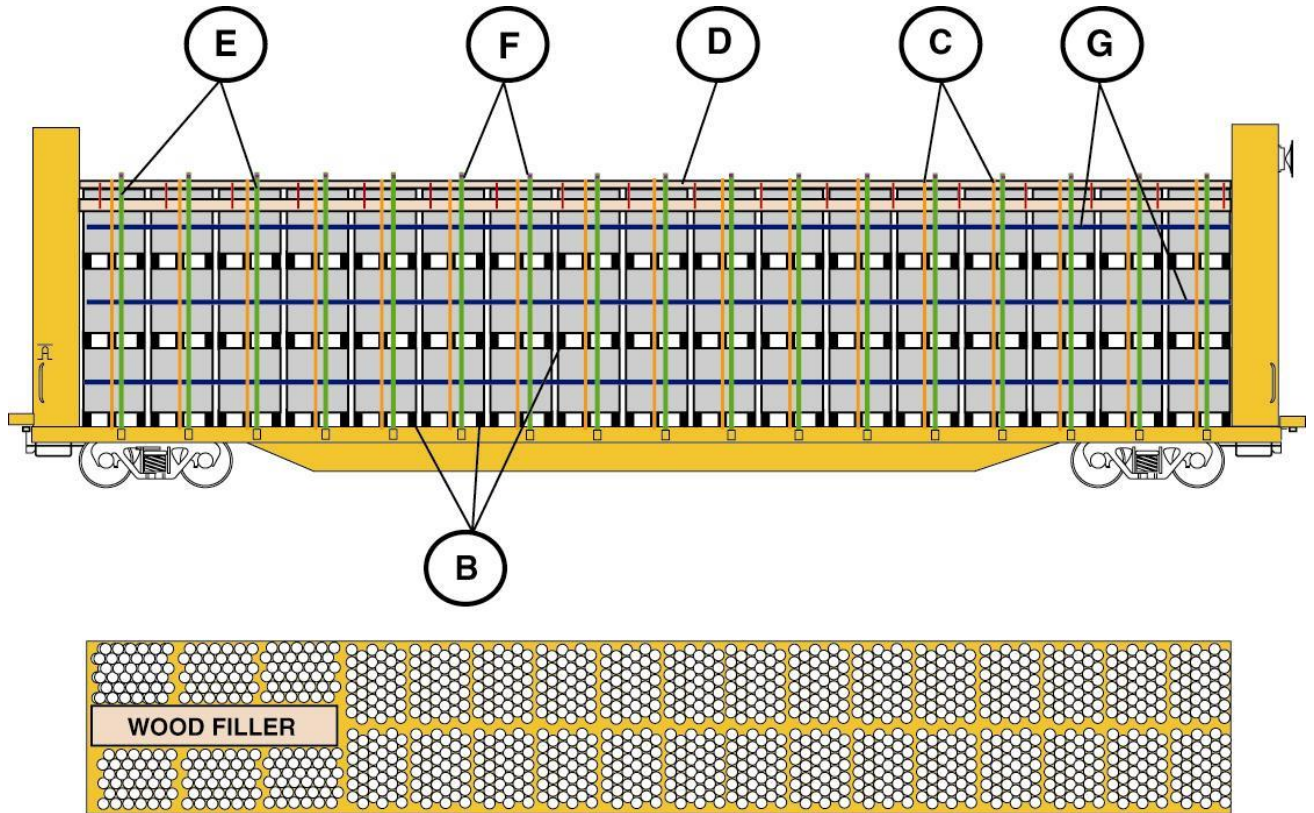

Item	No. of Pcs.	Description
A		Vacant
B	1 per package.	Pallets: Rolls are to be placed on a 53 in. x 44 in. x 5 in. high hardwood pallet.
C	1 per each stack of pallets.	Load retaining bands: 1-1/4 in. x .029 in. high tension bands.



**ROOF FELT PAPER ROLLS ON PALLET FLAT CARS WITH PERMANENT END BULKHEADS**

RAC 15242 (concluded)  
New -04-2000

Item	No. of Pcs.	Description
D	1 per outside top package	Top Corner Cap: Lumber, 2 in. x 4 in. placed on each side of the top row. Secure to inside face of stakes (Item E) with one (1) nail.
E	1 per each stake pocket	Side Stakes: One (1) stake per pile made of 4 in. x 4 in. hardwood placed in stake pockets on each side of the car. The stakes must exceed the top of the load by at least 6 in. to allow placement of 1-1/4 in. steel band Stake Ties (Item F)
F	1 per each pair of side stakes.	Stake Ties: 1-1/4 in. x .029 in. high tension bands. To retain side-by-side stakes. Locate as close to load as possible but not less than 5 in. from top of stakes.
G	1 per each layer.	Longitudinal Load Restraining band: 1-1/4 in. x .029 in. high tension bands.

**Notes:**

1. Height of load not to exceed height of bulkheads.
2. The rolls placed on the pallet must be shrink-wrapped encircled by a 1/2 in. polyester band. Total height of pallet and roll to be 41 inches.
3. Rolls of Tar Paper must be 36 inches high by 8-1/2 in. diameter.
4. The load shall consist of 3 tiers of pallets placed one on top of the other.
5. Each tier will be made of 28 pallets placed side-by-side with 53 in. side facing the bulkhead and 6 pallets placed side-by-side with the 44 in. side facing the bulkhead. The 18 in. void between the pallets placed lengthwise must be filled with an appropriate wood filler to maintain load at 106 in. wide. No lengthwise void permitted.
6. Inspect stake pockets for cracks in welds and or deformity prior to attaching securement.

For further details see General Rules.