
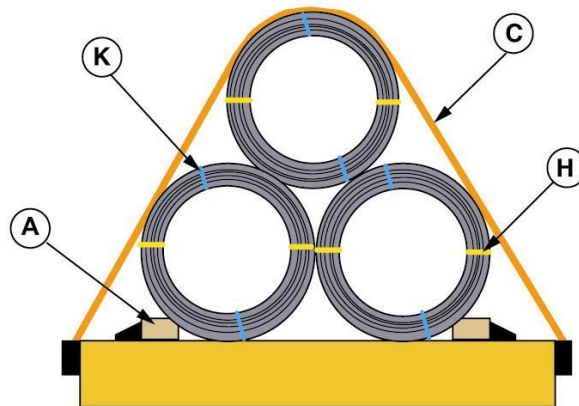


WIRE COILS, STEEL, EYE LONGITUDINAL, FLATBED TRAILERS ON EXPRESSWAY CARS

RAC 17006

New. 10-2001

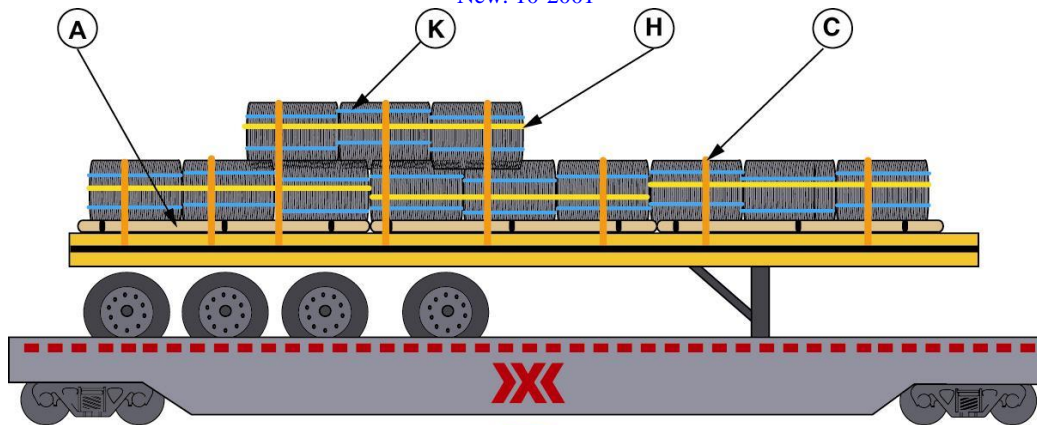

END VIEW

Item	No. of pieces	Description
A	2 per unit	Bearing pieces, 3 X 4 in. hardwood, held by steel brackets.
C	2 per unit of 3 coils	Tie down straps: Polyester webbing 3 in. wide with a minimum breaking strength of 15,000 lbs.
H	2 per unit of 3 coils	Unitizing bands, 1- 3/4 in. x .029 high-tension steel. Bands must be placed at 3 and 9 o'clock on the coils.
K	2 per package	Package eye bands: high tension bands 1-1/4 x .029.

Notes:

1. Top tier coils should be properly nested between coils in bottom row.
2. Top tier units must have at least one tie down band over each coil.

See General Rules for further details.