
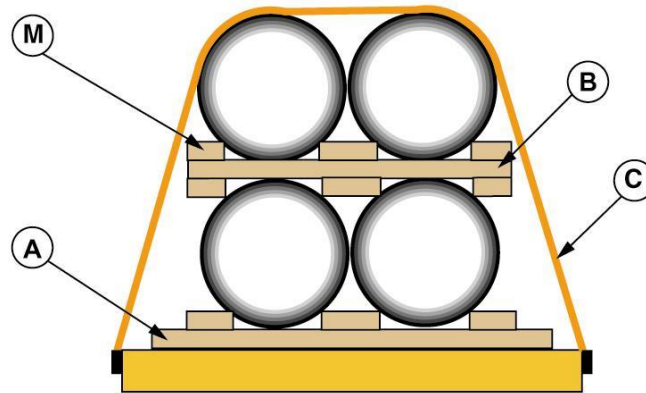


PIPES, CONCRETE, FLATBED TRAILERS ON EXPRESSWAY CARS

RAC 17008

New. 10-2001

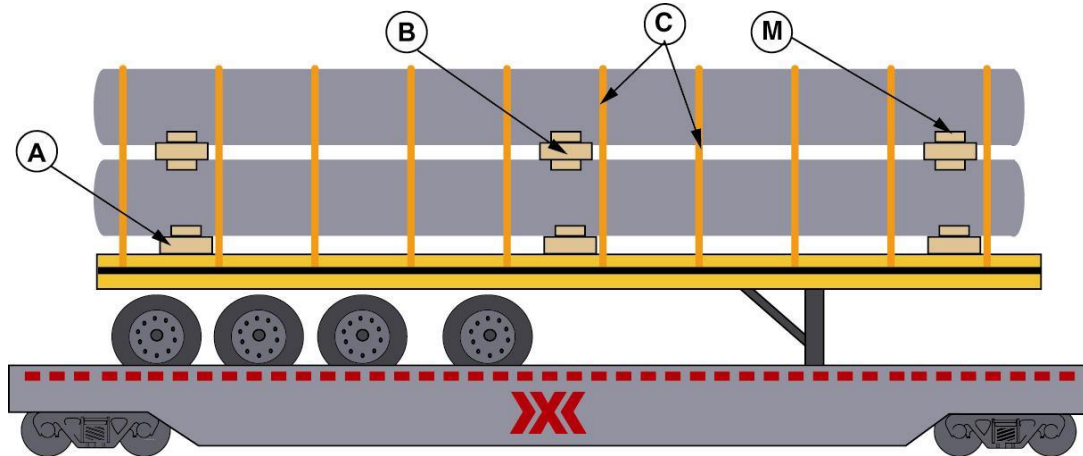

END VIEW

Item	No. of pieces	Description
A	3 per pile	Bearing pieces: hardwood 3 X 4 in. Wider edge of bearing piece must bear against deck when loading and unloading permits. Bearing pieces are not secured to deck. They should be placed not nearer than 12 in. from the ends of the deck or any possible interference. End chocks are required (Item M).
B	3 per pile	Separators: hardwood 3 X 4 in. To be positioned above bearing pieces (Item A). End chocks are required (Item M).
C	10 per pile	Tie down: Chains or polyester straps 3 in. wide with a minimum breaking strength of 15,000 lbs.
M	2 per Item A and 4 per Item B	Blocking, lumber 4x4.

PIPES, CONCRETE, FLATBED TRAILERS ON EXPRESSWAY CARS

RAC 17008 (concluded)

New. 10-2001

**Notes:**

1. A maximum of 2 layers of pipe is permissible.
2. When 2 layers are present, the lower row must be secured to the deck separately from the upper row. An equal number of chains or straps must secure both the lower and the upper layers.
3. Chains or straps are not to be secured diagonally across the load.
4. The use of corner protectors is optional for both chains and straps.

See General Rules for further details.