


ROLLS OF LANDFILL MATTING LOADED ON A FLAT RACK

RAC 17505
New. 03-2012

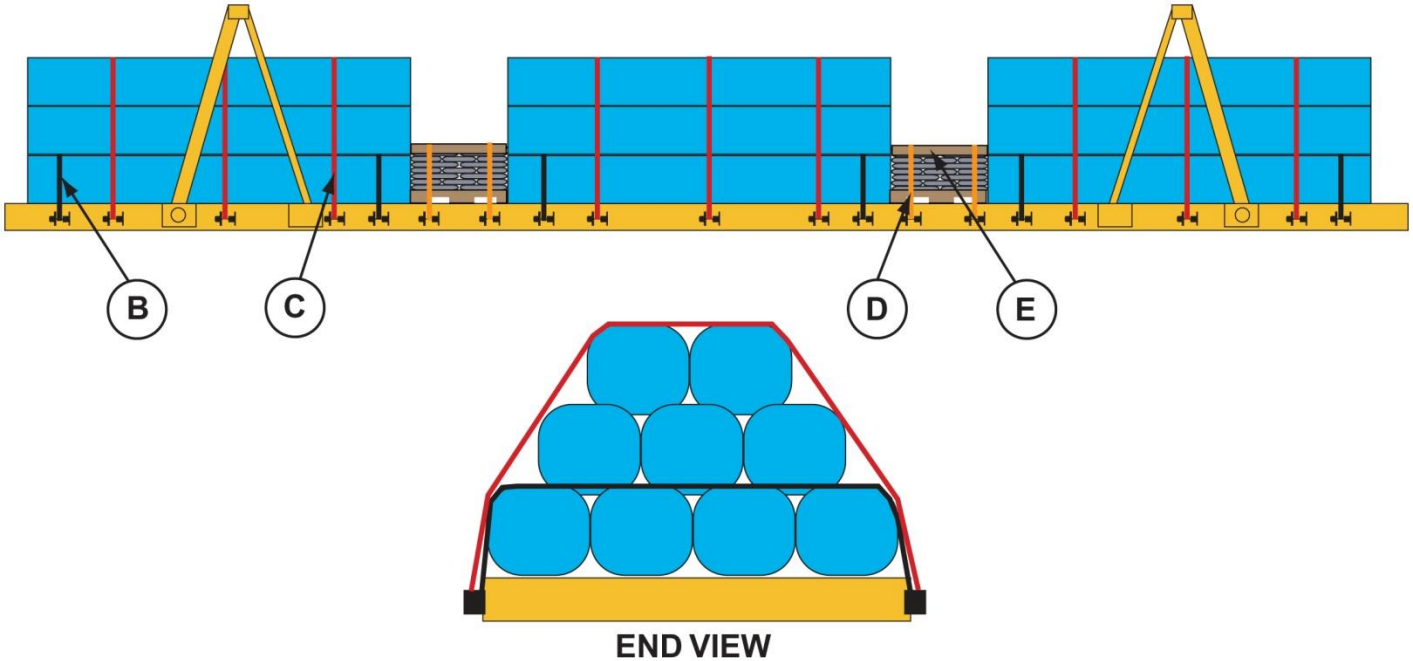

Item	No. of Items	Description
A		Vacant
B	2 per first layer	Tie-Down bands: PVC treated polyester webbing, 4 in. wide with a minimum of 5,000 lbs. working load limit. Straps must be secured to flatrack on side opposite winch, pass over top of first layer and secured to winch assembly. Tension with the use of a 24 in. to 30 in. bar.
C	3 per pile.	Tie-Down bands: PVC treated polyester webbing, 4 in. wide with a minimum of 5,000 lbs. working load limit. Straps must be secured to flatrack on side opposite winch, pass over top of load and secured to winch assembly. Tension with the use of a 24 in. to 30 in. bar.
D	2 per skid	Tie-Down bands: PVC treated polyester webbing, 4 in. wide with a minimum of 5,000 lbs. working load limit. Straps must be secured to flatrack on side opposite winch, pass over top of skid and secured to winch assembly. Tension with the use of a 24 in. to 30 in. bar.
E	2 per skid	Corner protectors: Each cap assembly to consist of two (2) pieces lumber, 2 in. x 4 in. forming a corner angle over skid.

NOTES:

1. Load will be tarped