


CONCRETE HOLLOW STRUCTURE MAXIMUM 8 FEET WIDE 4 TO 40 FEET
LONG LOADED ON FLAT RACK EQUIPPED WITH END BULKHEADS.

RAC 17508

New. 09- 2012

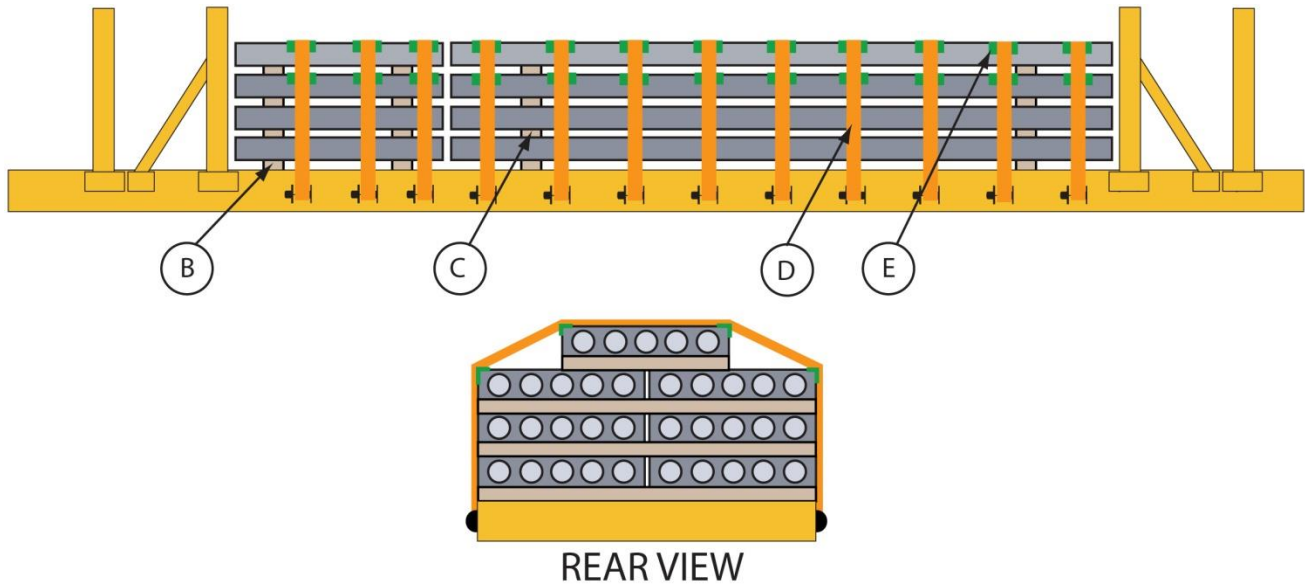

Item	No. of Items	Description
A		Vacant
B	2 per pile	Bearing pieces: hardwood 3 in. × 4 in. Length equal to width of load. Locate pieces 2 feet from each end of pile.
C	2 per pile.	Separators: hardwood 4 in. × 4 in. Length equal to width of load. Locate pieces 2 feet from each end of pile.
D	Minimum 2 per pile or 1 for every 5000 lbs.	Tie-down bands: 3 in. Polyester webbing with a MBS of 1600 lbs. Place across top of load and secure to winches. Strapping must be tensioned with the proper tensioning tool.
E	1 per corner	Corner protector weather resistant: 1 per each corner under web strap.

Notes:

See General Rules for further details.